




REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASE FOR QUOTE	10/2006

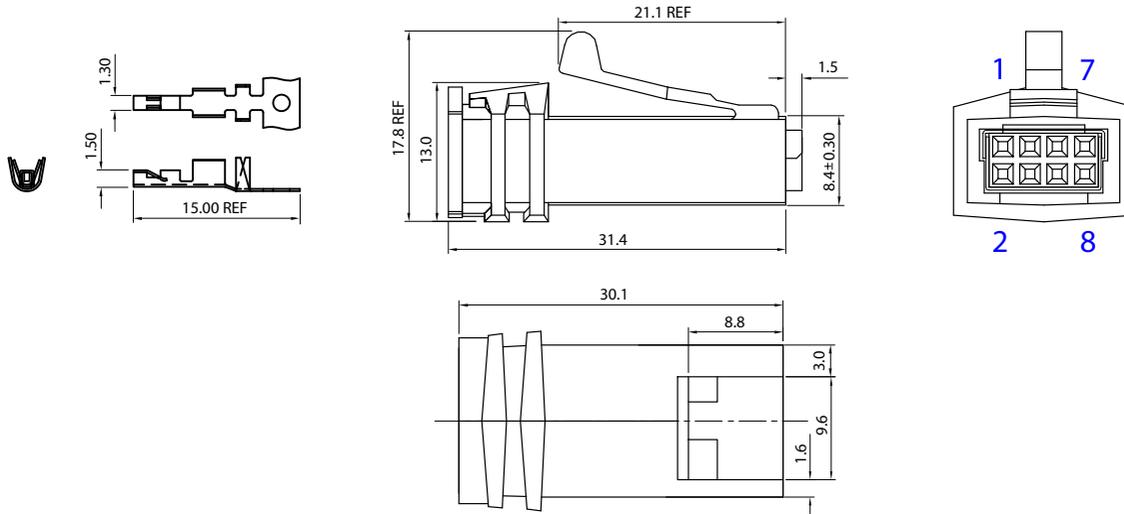

KEY POSITION 1

Note:
 1. All materials conform to EN Directive 2002/95/EC for RoHS compliance.
 Electrical Characteristics:
 Contact Resistance: Terminal 25mΩ Max. and ground terminal 8mΩ Max.
 Insulation Resistance: 100MΩ Min. at 500V DC.
 Dielectric Strength: 750V AC/1 minute.
 Insertion Force: 5.9kgf Max.
 Withdrawal Force: 1.59 ~ 5.9 kgf
 Latch Retention: 9.07 kgf Min.

UNLESS OTHERWISE SPEC'D DIM. ARE IN MILLIMETER. TOL. ARE: FRACTION DECIMAL ANGULAR ± ± ± .008 1/2°			THIRD ANGLE PROJECTION			CONQUEST TECHNOLOGY LIMITED			
MATERIAL			APPROVALS	DATE		8 Pin PoweredUSB, 2x4, 12V, 6.5mm Cable, Pebble Grey - RoHS		DWG. NO. 371012	
FINISH		DRAWN A. PEREZ	10/30/06	SIZE A					
DO NOT SCALE DRAWING				SCALE: N/A	SHEET 1 OF 1				