




REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASE FOR QUOTE	12/2006

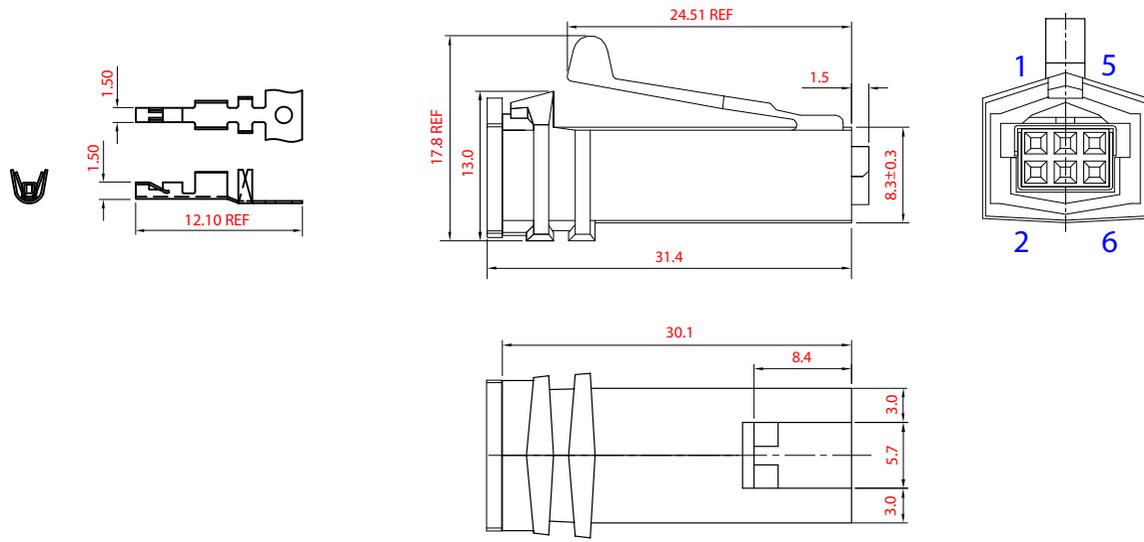

Note:
 1. All materials conform to EN Directive 2002/95/EC for RoHS compliance.
 Electrical Characteristics:
 Contact Resistance: Terminal 25m Max. and ground terminal 8m Max.
 Insulation Resistance: 100M Min. at 500V DC.
 Dielectric Strength: 750V AC/1 minute.
 Insertion Force: 5.9kgf Max.
 Withdrawal Force: 1.59 ~ 5.9 kgf
 Latch Retention: 9.07 kgf Min.

UNLESS OTHERWISE SPEC'D DIM. ARE IN MILLIMETER. TOL. ARE: FRACTION DECIMAL ANGULAR ± .XX ± .00X 1/2°								CONQUEST TECHNOLOGY LIMITED							
MATERIAL		APPROVALS		DATE		6 Pin PoweredUSB, 2x3 Plug Connector with Extended Latch, 5.2mm Exit Hole, Black - RoHS									
FINISH		DRAWN		Seto		12/20/06		SIZE		A		DWG. NO. 371259		REV A	
DO NOT SCALE DRAWING								SCALE		N/A		SHEET		1 OF 1	